

XCMG official platform
www.machmall.com/
machmall@xcmg.com



Advanced Configuration

Ecological and economical

- ▶ Engine compliant with Euro stage V Emission Standard
- ▶ The excellent matching of hydraulic system and engine is more powerful and fuel saving

Multiple applications

- ▶ The stretchable undercarriage can ensure the stability, improve the loading performance and meanwhile enhance the passing ability
- ▶ Tailless design and short slewing radius can achieve flexible operation in confined space
- ▶ Multiple additional configurations meet with different operating requirements

Comfortable operating experience

- ▶ Detailed design concept improves comfort
- ▶ Color display provides convenient visual information



Excellent after-sales service

- ▶ Global after-sales service system and quick response mechanism
- ▶ Real-time technical consultation and maintenance

Convenient maintenance

- ▶ Easy maintenance design, open the engine hood for no dead angle maintenance

Improved durability

- ▶ Four point support cab, with piping and wiring harness built-in
- ▶ Strengthened boom and arm, stress dispersing
- ▶ Upgrade undercarriage to improve load bearing performance

Ecological And Economical


Power system

- ▶ Engine compliant with Euro stage V Emission Standard can effectively reduce fuel consumption and emission. The mechanical oil-injection pump has more reliable performance. Sufficient reserve of low speed torque and strong power.



Hydraulic system

- ▶ Key hydraulic components adopt up-to-date technology, featuring hydraulic system with low energy consumption fast response speed, accurate control and small impact so that strong digging force and excellent operating efficiency are ensured. The power of engine and hydraulic system match perfectly so that the engine can work in optimum fuel consumption level to improve fuel efficiency and save operational cost.

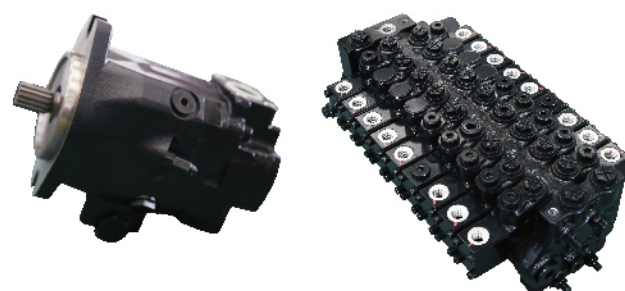

Multiple Application Conditions

- ▶ The adoption of tailless design and super short slewing radius ensures the machine to work in narrow working conditions.
- ▶ The left and right boom swing angle is respectively 75° and 50°, it can realize complex operation together with upper structure slewing to ensure that the digging is parallel with wall surface in narrow space through the cooperation of superstructure slewing so as to easily deal with various operating conditions.
- ▶ The stretchable undercarriage can improve the passing ability of the whole machine, and the widened undercarriage during operation provides better stability and loading performance for the whole machine.



Comfortable And Reliable

Comfortable

- ▶ More intimate configurations such as newly designed wrist rest and cup holder improve operating comfort and convenience of the operator.



- ▶ The newly designed reversible armrest will effectively increase aisle dimension.
- ▶ New color LCD monitor compliant with ergonomics requirements provides more automatic control functions and visual information so that trouble shooting time is greatly shortened.



Reliable



- ▶ Four-point support cab compliant with safety standard ensures the strength, meanwhile improves vision and guarantees higher operation security.
- ▶ The stress bearing capability of boom and arm is emphatically strengthened so that their service lives are improved.

▶ The built-in pipelines and wiring harnesses give more efficient protection to improve service life.



▶ Optimize the structure of the undercarriage and box-type bulldozer, which is more robust and durable.



Maintenance And Service

▶ Convenient maintenance and service at your fingertips.

Diesel oil filter, engine oil filter, oil-water separator and air filter are all designed for easy check and service on the ground; the inspection and refilling of oil, starting motor, battery and auxiliary water tank are extremely convenient.

▶ The refilling of fuel and water is convenient and efficient, which can be easily realized from antifreeze drain port, oil drain port, hydraulic oil drain port and diesel oil drain port at the bottom of turntable without removal of hood.

▶ The master power control devices are arranged under foot pedal baseboard, which is easier to be operated.

▶ A wide range of after-sales service system, quick-response rescue mechanism to ensure that you use at ease.



Standard Equipment

	Name of equipment	Direct Injection	XE15U
Engine	Engine model		D782
	Emission level		Euro V
	Manual preheating		
	Fuel strainer		
	Oil-water separator		
	Fuel filter		
	Radial seal air filter		
	Oil filter		
	Cleanable Radiator		
	Oil-water quick release device		
Hydraulic system	Mechanical rotation speed control		
	Unloading valve		
	Auxiliary hydraulic valve		
	Retractable and bulldozer switching circuit		
	Stop pressure relief		
Cab and interior trim	Hydraulic oil ISO VG 46		
	Single and double switchable hydraulic backup line		
	Adjustable seat armrest		
	Color LCD display with warning message, filter/liquid replacement information and hours of operation		
	Joysticks		
	Cup holder/file pocket		
	Cleanable floor mat		
	Retractable seat belt		
	High and low gears shift		

	Alarm horn
Safety and security configuration	Battery circuit breaker
	Overheat alarm mode
	Hydraulic safety locking lever
Chassis system and shield	Bottom frame traction ring
	Protective device kit: travel motor sealing plate
	Rubber crawler
	Retractable chassis
	Width adjustable dozer blade
Equipment	Boom
	Arm 0.95 m
	Bucket 0.04 m ³ earthwork bucket
Electrical system	Battery (325CCA)
	40 A alternator
	1.2 kW starter motor
Lighting lamp	Boom lamp
Counterweight	192 KG counterweightAlarm horn
Lubrication system	Rotary concentration

Optional Equipment

Hydraulic system	Hydraulic oil ISO VG 32, 68
Safety and security configuration	Falling object protection structure (FOPS)
Chassis system and shield	Steel crawler
Equipment	Quick coupler
	Bottom frame traction ring



Main Specifications

Item	Unit	Parameters
Model	/	XE15U
Operating weight	Kg	1795
Bucket capacity	m ³	0.04
Engine	Model	/
	Direct Injection	/
	Four Strokes	/
	Water Cooling	/
	Turbo-charging	/
	No. of Cylinders	/
	(GB/T 17692)Rated net power	kw/rpm
	Maximum torque/speed	N.m
	Displacement	L
	Travel speed	km/h
Main Performance	Swing speed	r/min
	Gradeability	°
	Ground pressure	kPa
	Bucket digging force	kN
	Arm digging force	kN
	Maximum tractive force	kN
	Rated flow of main pump	L/min
	Working Pressure	MPa
	Travel system pressure	MPa
	Swing system pressure	MPa
Oil Capacity	Pilot system pressure	MPa
	Fuel tank capacity	L
	Hydraulic tank capacity	L
	Engine oil capacity	L

	Item	Unit	Parameters
Standard Configuration	Length of boom	mm	1828
	Length of arm	mm	950
	Bucket capacity	m ³	0.04
Optional Configuration	Bucket capacity	m ³	
	Auxiliary tools and others	/	


Dimensions

	Item	Unit	Parameters
Appearance size	A Overall length	mm	3560
	B Overall width	mm	990/1240
	C Overall height	mm	2350
	D Width of platform	mm	990
	E Total width of chassis	mm	990/1240
	F Width of crawler	mm	230
	G Crawler base	mm	1270
	H Track gauge	mm	760/1010
	I Counterweight clearance	mm	450
	J Minimum ground clearance	mm	145

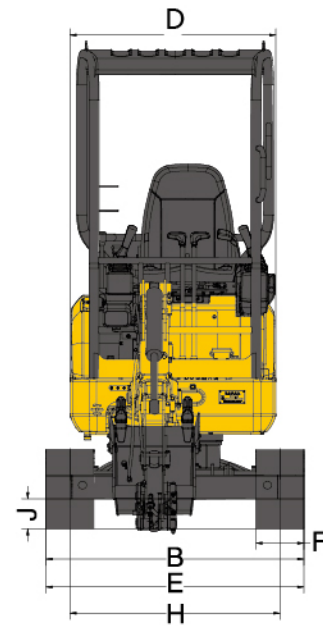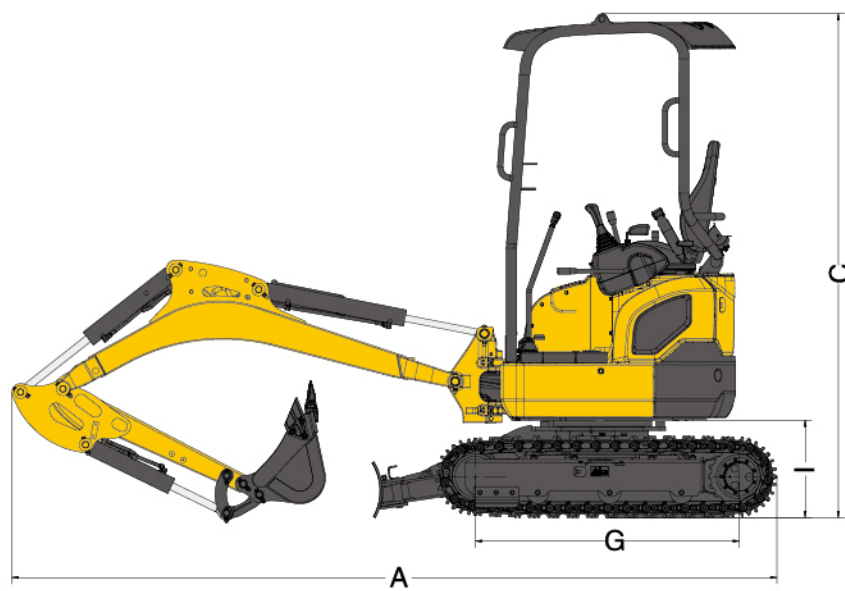

working Range

	Item	Unit	Parameters
working range	A Maximum digging height	mm	3475
	B Maximum dumping height	mm	2415
	C Maximum digging depth	mm	2290
	D Maximum vertical wall digging depth	mm	1750
	E Maximum digging radius	mm	3900
	F Minimum swing radius	mm	1550
	G Minimum tail swing radius	mm	620
	Maximum Dozer Lifting Height	mm	260
	Maximum Dozer Cutting Depth	mm	180

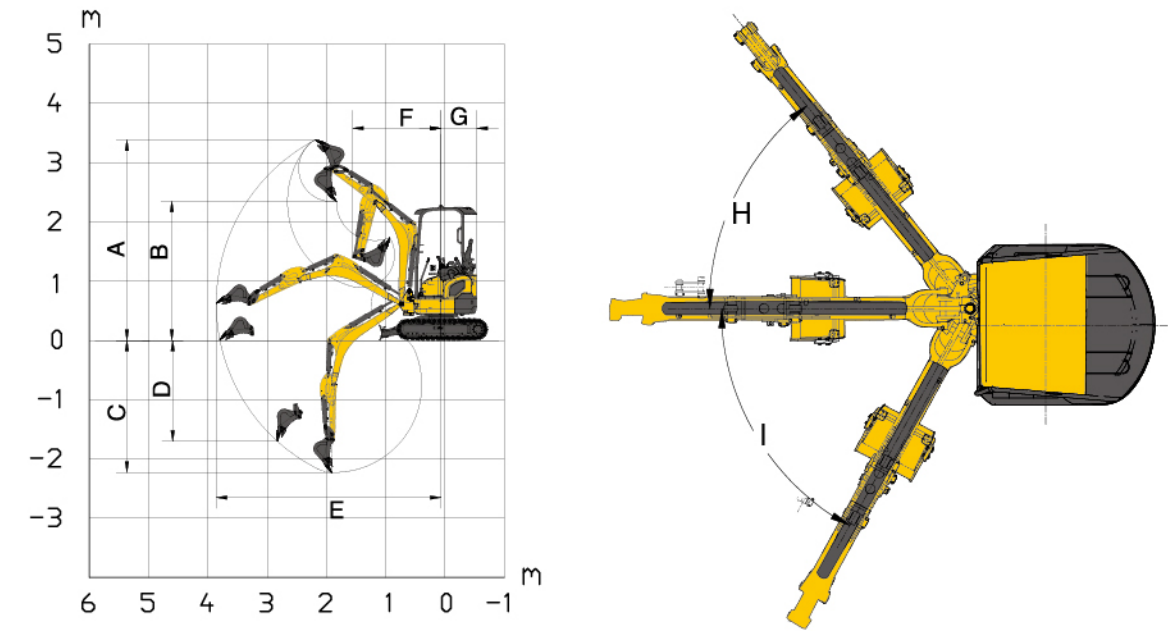

Lifting Capacity

Lifting point height (m)	Rated lift capacity – Straight ahead (back) (kg)				Rated lift capacity – over-side (kg)			
	Lifting point radius (m)			Lifting capacity at maximum radius	Lifting point radius (m)			Lifting capacity at maximum radius
	1	2	3		1	2	3	
2	*296.2			313.2	*296.2			256.8
1	536.2	296.7		258.3	427.8	242.3		211.2
Ground		500.6	285.8	256.8		394.7	231.7	208.9
-1	*970.1	497.3		316.9	*970.1	391.6		255.6

Capacities marked with an asterisk(*) are limited by hydraulic capacities.



Machmall.com is an electromechanical product platform officially launched by XCMG, aiming to provide global customers with a complete set of high-quality construction machinery solutions and supporting equipment.

Xuzhou Construction Machinery Group Co., Ltd. (XCMG Group), founded in 1943, is the fourth largest worldwide construction machinery manufacturer and the largest in China with products covering 183 countries and regions.

XCMG have 12 complete solutions: Crane lifting, Mining Construction, Earth-moving Solutions, Road Machinery, Concrete Equipment, Tunnel and Underground Space Construction, Mobile Elevating Work Platform (MEWP), Piling and Non-excavation Equipment, Transportation Equipment, Environmental Sanitation Equipment, Firefighting, Safety and Emergency Rescue

徐工徐工，助您成功

— XCMG for your success —

