



GR135

MOTOR GRADER

平地机

The GR135 motor grader is mainly used for ground leveling, ditching, slope scraping, bulldozing, scarification, snow removal for large areas such as highway, airports, farmlands etc. It is the necessary construction machinery for national defense construction, mine construction, urban and rural road construction and water conservancy construction, farmland improvement and so on.

GR135平地机主要用于公路、机场、农田等大面积的地面平整和挖沟、刮坡、推土、松土、除雪等作业。是国防工程、矿山建设、城乡道路等建筑施工和水利建设、农田改良等所必须的工程机械。

Performance Characteristics / 性能特点

- GR135 adopt Dongfeng cummins 6BT5.9-C130-II turbocharged diesel engine, Large output torque and power reserve coefficient and low oil consumption.
- Torque converter has big torque coefficient, wide high efficiency area. It has good combination working characteristics with engine. The transmission box has six forward gears, three backward gears, with neutral start protection function, gear shift controlled by electro-hydraulic, flexible operation, shift without impact, reasonable speed ratio distribution, meet the requirements of various working conditions.
- The rear axle adopts balanced suspension to ensure the uniform load of four wheels, which is conducive to the full use of its adhesion ability. The main drive of the rear axle is equipped with "NO - SPIN" self-locking differential.
- The front axle is steering axle. The axle can swing from side to side. In addition to the front steering, it also uses the articulated frame, which can further reduce the turning radius.
- The hood is structural part, well shaped with turn over function, the two sides double door is reversible, enhances the maintainability.
- GR135采用东风康明斯6BT5.9-C150-II涡轮增压柴油机，输出扭矩和功率储备系数大，油耗低。
- 变矩器变矩系数大、效率高、高效区宽，与发动机匹配具有良好的联合工作特性。变速箱为前进六档，后退三档，具有空档启动保护功能，档位变换为电液控制，操纵灵活，换挡时无冲击，速比分布合理，满足了各种工况要求。
- 后轴采用平衡悬挂方式能够保证四个车轮负荷均匀，有利于充分发挥它的附着能力。后桥主传动装有“NO—SPIN”无自转自锁差速器。
- 前桥为转向桥。桥体可左右摆动。该机除前轮转向外，还采用了铰接车架，可使转弯半径进一步减小。
- 机罩采用结构件，造型美观流畅，两侧开侧门，整体可翻转，提高了维修性。


GR135

MOTOR GRADER

平地机

Main Dimensions

主要尺寸

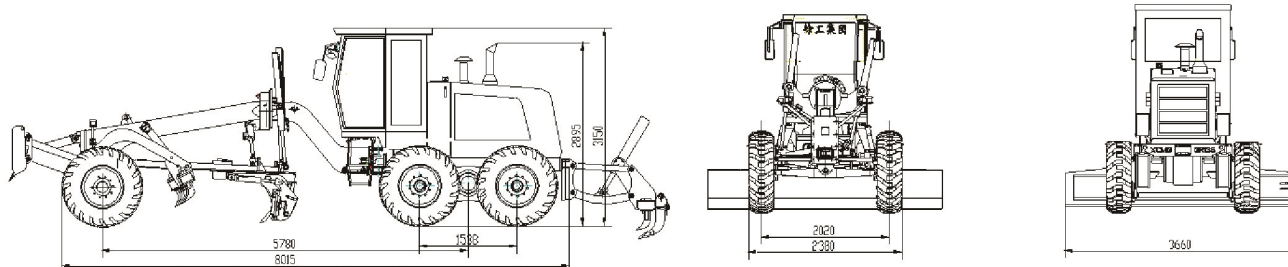

Main Specifications

主要技术参数

	Item	项目	单位 Unit	GR135	
Basic parameters 基本参数	Engine model	发动机型号		6BTA5.9-C150-II	
	Rated power/speed	额定功率/转速	kW/rpm	112/2200	
	Overall dimension (standard)	整机外型尺寸 (标配)	mm	8015 × 2380 × 3050	
	Total weight (standard)	整机重量 (标配)	kg	11200	
	Tire specification	轮胎规格		13.00-24	
	Ground clearance (front axle)	离地间隙 (前桥)	mm	515	
	Tread	轮距	mm	2020	
	Space of front and rear axles	前后桥距	mm	5780	
Performance parameters 性能参数	Space of middle and rear wheels	中后轮距	mm	1538	
	Forward velocity	前进速度	km/h	5、8、13、20、30、42	
	Reverse speed	后退速度	km/h	5、13、30	
	Tractive effort f=0.75	牵引力f=0.75	kN	≥59	
	Maximum gradeability	最大爬坡能力	%	≥25	
	Inflation pressure of tires	轮胎充气压力	kPa	300	
	Working system pressure	工作系统压力	MPa	16	
	Transmission pressure	变速箱压力	Mpa	1.3—1.8	
Working parameters 工作参数	Maximum steering angle of front wheels	前轮最大转向角	°	± 49	
	Maximum inclination angle of front wheels	前轮最大倾斜角	°	± 17	
	Maximum swing angle of front axle	前桥最大摆动角	°	± 15	
	Maximum swing angle of balance box	平衡箱最大摆动角	°	± 16	
	Maximum steering angle of frame	车架最大转向角	°	± 27	
	Minimum turning radius	最小转弯半径	m	6.6	
	Blade	Maximum lifting height	最大提升高度	mm	410
		Maximum shoveling depth	最大铲土深度	mm	515
		Maximum lateral inclination angle	最大侧倾角度	°	90
		Cutting angle	切削角	°	54—90
Slewing angle		回转角	°	360	
Length × chord height		长度×弦高	mm	3660 × 610	
Oil filling amount 加注油量	Coolant	冷却液	L	50	
	Fuel tank	燃油箱	L	280	
	Engine	发动机	L	18	
	Transmission	变速箱	L	26	
	Balance box	平衡箱	L	46	
	Drive axle	驱动桥	L	28	
	Hydraulic oil	液压油	L	96	



Machmall.com is an electromechanical product platform officially launched by XCMG, aiming to provide global customers with a complete set of high-quality construction machinery solutions and supporting equipment.


Xuzhou Construction Machinery Group Co., Ltd. (XCMG Group), founded in 1943, is the fourth largest worldwide construction machinery manufacturer and the largest in China with products covering 183 countries and regions.

XCMG have 12 complete solutions:Crane lifting,Mining Construction,Earth-moving Solutions,Road Machinery,Concrete Equipment,Tunnel and Underground Space Construction,Mobile Elevating Work Platform (MEWP),Piling and Non-excavation Equipment,Transportation Equipment, Environmental Sanitation Equipment,Firefighting,Safety and Emergency Rescue



 <https://www.machmall.com/>

 machmall@xcmg.com

 0086 18652183963
86-516 8773 9797