

XC6-4517K

TELESCOPIC HANDLER

Main parameter

Item	XC6-4517K	unit
Gross weight	13500	kg
Engine power	82(CUMMINS)/74.9(DDE)	kW
Rated load	4500	kg
Maximum lifting height	16700	mm
Maximum forward reach	12600	mm
Effective load at maximum forward reach	490	kg
Center distance of load	600	mm
Luffing angle	-4 ~ 73	°
Fork angle	-90 ~ 18	°
Maximum traction force	70	kN
Gradeability	25	°
Maximum traveling speed	36	km/h
Turning radius	5000	mm
Braking distance	10 (Initial speed 32 ± 2km/h)	m
Overall length	6960	mm
Overall width	2500	mm
Overall height	2850	mm
Wheelbase	3900	mm
Wheel tread	2060	mm
Fork length	1200	mm

No further information of sample contents, product structure and configuration parameters updates.
There may be some difference between sample books and material objects. Please kind prevail.



Web: machmall.com
Tel: +86-516 8773 9797
E: machmall@xcmg.com



Description	Specification
Operating weight	13500kg
Rated load	4500kg
Maximum lifting height	16700mm
Maximum traction force	≥70kN



XC6-4517K

Product Overview

- XC6-4517K telescopic handler is a representative product of our K series telescopic handlers. This product is equipped with imported Cummins engine of strong and reliable power and imported axles and transmission of stable drive. The full-hydraulic wet brake is applied to ensure driving safety. The four-section telescopic boom structure features flexible operations, accurate forklifting, and automatic leveling, with the maximum lifting height up to 16.7m. It's a multifunctional high-efficiency small-sized construction machinery product.

Characteristics

- The panoramic cab and the XCMG's visual identity appearance design feature good fashion and elegance.
- Powerful international brand engines; Special CARRARO transmissions and axles for smooth drive.
- The international top-level full-hydraulic wet brake system features stable and reliable braking and guarantees driving safety.
- The four-wheel drive and multiple steering modes (including four-wheel, two-wheel, and crab steering modes) realize super-strong off-road capability and adapt to diversified working conditions.
- The frame leveling function equipped (The body is capable of 10° swing in both leftward and rightward directions) realizes powerful site adaptability and meets the needs of diversified working conditions.
- The special overload control system guarantees operation safety and reliability.
- The electrohydraulic proportional control for the working system features accurate, stable, and efficient operations.
- The leading human-machine interaction system and the instrument, monitoring, and alarm system with complete functions provide you energetically with a comfortable, intelligent, and safe operation experience.
- Optional aerial working platform, bucket and various tools to meet customer needs.

Industry position


- Business leader of China telescopic handlers.
- Business standards maker of China telescopic handlers.
- Record creator in China's industry.



XC6-4517K

Flexible steering control modes

- Two-wheel steering mode: For common operations and high-speed site transfer.
- Four-wheel steering mode: For operations in narrow spaces.
- Crab steering mode: For operations in slanted narrow spaces.

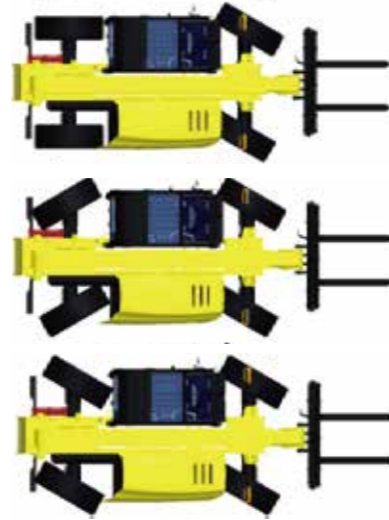

Comfort drive and easy operation

- Luxury and comfortable cabin with soundproof, thermal insulation, vibration reduction and open visionary.
- Ergonomic joysticks and dashboard layout, suspension seat for operator's easy operations.
- FOPS&ROPS cabin, extinguisher and rescue hammer are equipped to ensure operator's safe operation.

Super strong structure and reliability

- The critical structural parts, such as telescoping boom, are proved by stringent durability test to meet the needs of diversified severe working conditions.



Has passed fatigue load and overload tests of 200,000 times



XC6-4517K

Intelligent technology and high operation safety

- The special overload control system real-time monitors the operation situation and the sound-light alarm and overload safety protection function are provided to ensure high safety and reliability.
- The fork leveling system adopts the automatic flow compensation technology to automatically control the levelness of forks during the luffing of the boom, in order to guarantee the forklifting stability and safety in heights.
- The frame leveling function equipped maintains the levelness of the machine under diversified working conditions, featuring powerful site adaptability and high operation safety.



Convenient maintenances

- With design of side-turning large-opening hood, "one-stop" maintenance can be fulfilled for the engine oil filter, diesel filter, and air filter.
- Parallel integrated fuse box of centered control for easier and effective inspections.



Meets various working conditions



XCMG Telescopic Handlers Celebrate 50th Anniversary of Diplomatic Relations between China and France



XCMG Telescopic Handlers Build Steel Structures Overseas



XCMG telescopic handlers help municipal constructions in Africa



XCMG Telescopic Handlers Build Sugar Refinery in Ethiopia



Machmall.com is an electromechanical product platform officially launched by XCMG, aiming to provide global customers with a complete set of high-quality construction machinery solutions and supporting equipment.

Xuzhou Construction Machinery Group Co., Ltd. (XCMG Group), founded in 1943, is the fourth largest worldwide construction machinery manufacturer and the largest in China with products covering 183 countries and regions.

XCMG have 12 complete solutions: Crane lifting, Mining Construction, Earth-moving Solutions, Road Machinery, Concrete Equipment, Tunnel and Underground Space Construction, Mobile Elevating Work Platform (MEWP), Piling and Non-excavation Equipment, Transportation Equipment, Environmental Sanitation Equipment, Firefighting, Safety and Emergency Rescue


徐工徐工，助您成功

— XCMG for your success —



 <https://www.machmall.com/>

 machmall@xcmg.com

 0086 18652 183963
86-516 8773 9797

